

No. 89

Instructions:

- 1. Shut off water supply & disconnect.**
- 2. Unbolt tank from bowl.**
- 3. Remove old flush valve & flapper.**
- 4. Install new flush valve as shown. (4a)**
- 5. Check height of flush valve. (5a)**


Top of flush valve should be no more than 3/4" above water line marked in tank. Verify top of flush valve is at least 1" below bottom of flush lever nut.

Note: Verify C/L line (critical level) on fill valve or ballcock is at least 1" above top of overflow tube. This is a plumbing code requirement.


Caution: If the top of the overflow tube in your toilet is higher than the flush lever opening, water could leak out.

- 6. Reassemble tank to bowl.**
- 7. Reattach refill tube and install flapper. (7a)**
- 8. Connect water supply line & turn on water supply.**


4a.




5a.

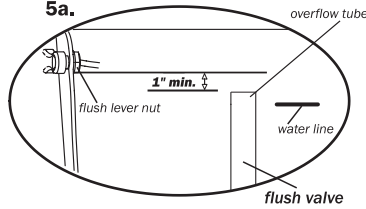

6a.

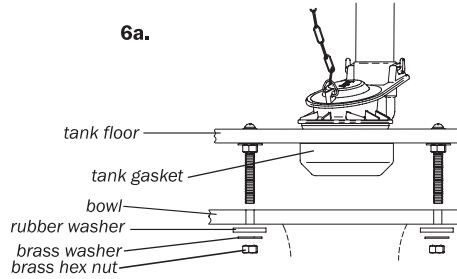

7a.

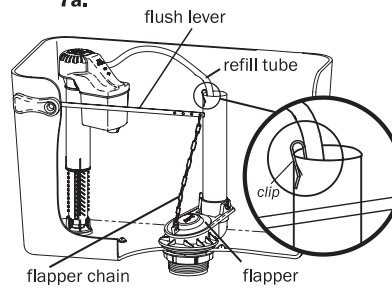

UPC:
049057008904